



MGH-NB-075-10T

MGH-NB-075-10T

RATING

| | |
|--|---------------------|
| Power rating, kW (HP) | 55 (75) |
| Maximum Polished Rod Speed (RPM) | 500 |
| Thrust Bearing rating, ISO kN (lbf) | 720 (161,862) |
| Thrust Bearing rating, Ca90 kN (lbf) | 187 (41,964) |
| Thrust Bearing 25,000hr @ 500 RPM L10 kN (lbf) | 10T - 99 (22,214) |
| Gear Ratio | 3.96 : 1 |

STRUCTURAL

| | |
|---------------------------------------|------------------------------|
| Polished rod size in. | 1 1/4" or 1 1/2" |
| Wellhead connection | 3 1/8" 3,000 psi R-31 Flange |
| Overall-L-W-H (mm / inches) | 605-416-846/24-17-38 |
| Drivehead Weight - w/motor (kg / lbs) | 209 / 460 |

BRAKING SYSTEM

Orifice in Hydraulic - Hose/skid

OPTIONAL EQUIPMENT

Environmental Seal Integral

Environmental Seal Booth (open)

Rope Packing Seal


Leak Detection System

Tachometer

MAINTENANCE

Gear Oil - 75W90 SYN - 9 liters

Frequency 6 - 12 months

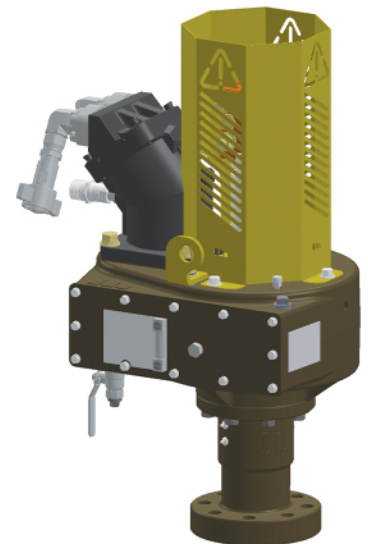

'CAUSE WE GIVE A S#!T